


M@X6®

Unshielded Twisted Pair (UTP) Category 6 - Outdoor

Generally to EIA/TIA 568-C.2
AS/NZS 3080
ACMA - AS/CA S008

Cable Design

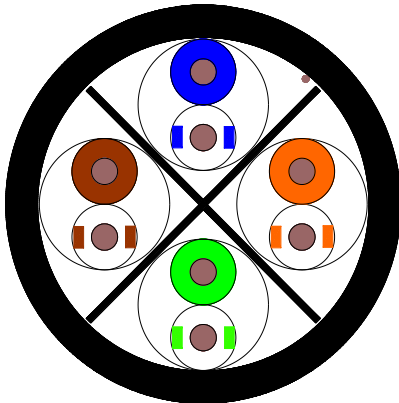

- **Multi-pair construction**
- **Conductor:** Annealed solid copper wire 0.57mm diameter (23 AWG)
- **Insulation:** Polyethylene compound in compliance with AS 1049
- **Cabling element:** Twisted pair
- **Colour code:** See table 1
- **Stranding of pairs:** Stranded around cross web filler
- **Longitudinal water tightness:** Jelly filled interstices
- **Sheath:** UV stabilised Polyethylene in compliance with AS 1049. Ripcord provided beneath the sheath for easy removal

- Drawing not to scale -

100Ω balanced UTP cable suitable for Local Area Network (LAN) cabling up to 250 MHz capable of supporting transmission rates of up to and including 10-Gigabit Ethernet.

Technical data

Number of Pairs		4
Cable nominal diameter	mm	6.8 ± 0.5
Cable nominal weight	kg/km	50
Max. pulling tension	N	110
Min. bending radius	mm	8 x Cable OD
Temperature range	°C	Installation 0 -> +50 Operation -15 -> +70

Identification

Sheath Colour:

The standard outer sheath colour is black.

Sheath Marking:

The outer sheath is marked in 1 meter intervals as follows:

PRYSMIAN M@X6 4PR CATEGORY 6 OUTDOOR 23AWG L4P60J MM/YY T/N #### *****M >> | << *****M

Where:

- MM/YY = Month/Year of manufacture
- #### = Job Numbers
- *****M >> | << *****M = Metre Marking with cut line

Transmission characteristics							
Frequency [MHz]	Return Loss [dB] Min	Insertion Loss [dB/100m] Max	NEXT [dB] Min	PS NEXT [dB] Min	ACRF [dB] Min	PS ACRF [dB] Min	Propagation Delay Skew [ns/100m] Max
1.0	20	2.1	74.3	72.3	67.8	64.8	45
4.0	23	3.8	65.3	63.3	55.8	52.8	
10.0	25	5.9	59.3	57.3	47.8	44.8	
16.0	25	7.5	56.2	54.2	43.7	40.7	
20.0	25	8.4	54.8	52.8	41.8	38.8	
31.25	23.6	10.5	51.9	49.9	37.9	34.9	
62.5	21.5	15.0	47.4	45.4	31.9	28.9	
100	20.1	19.1	44.3	42.3	27.8	24.8	
200	18.0	27.6	39.8	37.8	21.8	18.8	
250	17.3	31.1	38.3	36.3	19.8	16.8	

Electrical characteristics	
DC resistance [Ω /100m]:	9.38 Max.
Resistance unbalance [%]:	4 Max.
Mutual capacitance @1kHz [nF/100m]:	6.5 Max.
Capacitance unbalance @1kHz, pair to ground [pF/100m]:	330 Max.
<i>Note: All electrical characteristics are given at 20°C</i>	

Water penetration

5 metre sample length, 1m water height, no water leakage after 24 hours. Tested as per IEC 60794-1-22-F5B.

Table 1. Colour code / Pair identification

Pair number	Insulation colour				
	Wire a	Wire b		Wire a	Wire b
1	Blue	White blue stripes (2)	3	Green	White green stripes (2)
2	Orange	White orange stripes	4	Brown	White brown stripes (2)

Logistic

Packing:

Plywood drums

Delivery Lengths:

Standard delivery length is 500 metres

© PrysmianGroup 2012, All Rights Reserved

All sizes and values without tolerances are reference values. Specifications are for product as supplied by PrysmianGroup: any modification or alteration afterwards of product may give different result.

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of PrysmianGroup. The information is believed to be correct at the time of issue. PrysmianGroup reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorised by PrysmianGroup.